


亚克力油性纯胶

Solvent-based Acrylic Bonding Sheet

◆ 产品结构 Product Structure

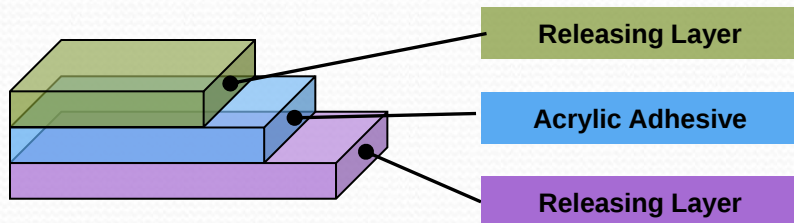

◆ 产品实例 Product Sample



A700-35X1

◆ 产品特点 Product Features

- 高信赖性及绝缘性 High reliability and good insulation
- 优异耐热性 Excellent heat resistance
- 优异储存性 Long shelf life
- 优异剥离力 Outstanding peel strength
- 优异耐污性 Splendid stain resistance

◆ 产品特性 Characteristics

检验项目 Test Items	测试条件 Condition of Testing	单位Units	产品Product	测试方法 Test Method
			A700-35X1	
厚度 (Thickness)	A	μm	35±10%	APLUS SPEC
剥离强度 (Peel strength)	PI/PI	kgf/cm	≥1.0	IPC-TM-650 2.4.9
	PI/Cu		≥1.0	
	PI/Ink		≥1.0	
	PI/FR4		≥1.0	
焊锡耐热性 (Solder resistance)	10 seconds at 288℃	—	PASS	IPC-TM-650 2.4.13
耐化性 (Chemical resistance)	IPA/2M HCl / 2M NaOH	%	≤20	IPC-TM-650 2.3.2
溢胶量 (Resin flow)	A	mm	≤0.3	IPC-TM-650 2.3.17.1
热力学特性 (Thermodynamic property)	Td 5% Weight loss	℃	357	IPC TM-650 2.4.24.6
	Tg	℃	36	IPC TM-650 2.4.24.3
储存期限 (Shelf life)	≤10℃, 40-70%RH	month	6months in the original producing	APLUS SPEC

*所有数据为测试代表值 All data are representative value and not guarantee.